

## Zirkon® Ref Process Refill

Zirkon® Ref Refill are refillable reference electrodes. They are used as a reference point for other electrodes with relative potentials e.g. in pH or ORP measurements. The liquid filled sensor is mainly used in waste water. For highly polluted measuring media the electrolyte bridges are recommended, because the reference electrode will not be in contact with the measuring media.

### Benefits

- > Long life time by refill
- > Sensor protection via electrolyte bridge
- > Made in Germany

### Measuring Parameter

- > pH-Value: pH 0...14

### Process Conditions

- > Min. Conductivity: > 50  $\mu\text{S}/\text{cm}$
- > Temperature: -5...+100°C

### Mechanical Construction


- > Junction: 2 x Platinum
- > Shaft Material: Glass
- > Shaft Length: 160 mm
- > Shaft Diameter: 12 mm
- > Process Connection: Nozzle

**Article. No: S24133830K**  
**Order Code: 224B30001**

### Zirkon® Ref Process Refill



### Mechanical Drawing

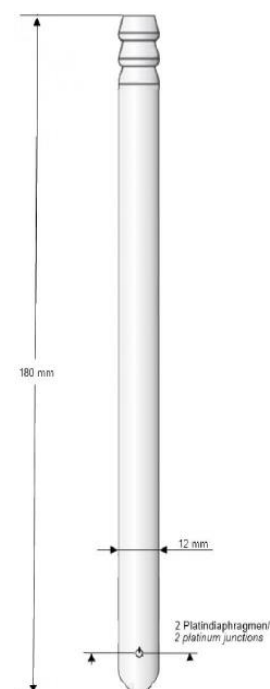



**Kuntze Instruments GmbH**  
Robert-Bosch-Str. 7a  
40688 Meerbusch  
Germany

+49 2150 70660  
[info@kuntze.com](mailto:info@kuntze.com)  
[www.kuntze.com](http://www.kuntze.com)